

# LED DOWN LIGHT

Shine a New Light Downward

Model No.	Watt	Lumens	Cut-Out Dia (in mm)	Outer Dia (in mm)	Height (in mm)	Shape
RNDLR12	12	1680	112	119	58	ROUND
RNDLR18	18	2520	125	154	58	ROUND
RNDLR22	22	3080	150	175	58	ROUND
RNDLS12	12	1680	100 x 100	110 x 110	58	SQUARE
RNDLS18	18	2520	120 x 120	145 x 145	58	SQUARE
RNDLS22	22	3080	140 x 140	170 x 170	58	SQUARE

**Available Color Temperature (CCT) :**  
 2700K, 3000K (Warm White), 3500K,  
 4000K (Natural White), 5000K, 5700K, 6500K (Cool White)

## Technical Specification : -

**Input Voltage :**  
 110Vac- 270Vac / 50Hz-60Hz

**Beam Angle : 140 Degree**

**CRI (Color Rendering Index) : 80**

**Surge Protection : 2Kv Inbuilt**

**Power Factor : >0.90**

**THD : <10%**

**Housing Material : Powder Coated Non- Corrosive Aluminum Die-Cast**

**LED Source : 0.2Watt Higher Lumen LM80 Certified LED  
 (CREE/Bridglux/Edision/Seoul)**

**Short Circuit & Open Circuit Protection / Built-In PFC Function**

**440Vac Input Voltage Protection / Under Voltage & Over Voltage Protection**



**CLICK TO CONNECT**



24 Months  
Warranty



BIS Approved  
LED Driver



Made in India



Premium  
Products

# COB LIGHT

Radiate Brilliance, Transform Darkness!

Model No.	Watt	Lumens	Cut-Out Dia (in mm)	Outer Dia (in mm)	Height (in mm)
RNCOB4	4	560	60	66	70
RNCOB7	7	980	60	66	70
RNCOB12	12	1680	75	85	70
RNCOB18	18	2520	85	95	70
RNCOB24	24	3600	105	120	70

**Available Color Temperature (CCT) :**  
 2700K, 3000K (Warm White), 3500K, 4000K (Natural White),  
 5000K, 5700K, 6500K (Cool White)

## Technical Specification : -

**Input Voltage :**  
 110Vac- 270Vac / 50Hz-60Hz

**Beam Angle :** 140 Degree



**CRI (Color Rendering Index) :** 80

**Surge Protection :** 2Kv Inbuilt

**Power Factor :** >0.90

**THD :** <10%

**Housing Material :** Powder Coated Non- Corrosive Aluminum Die-Cast

**LED Source :** LM80 Certified COB LED (CREE/Bridglux/Edision/Seoul)

**Short Circuit & Open Circuit Protection / Built-In PFC Function**

**440Vac Input Voltage Protection / Under Voltage & Over Voltage Protection**



**CLICK TO CONNECT**



24 Months  
Warranty



BIS Approved  
LED Driver



Made in India



Premium  
Products

# MOVABLE COB LIGHT

Radiate Brilliance, Transform Darkness!

Model No.	Watt	Lumens	Cut-Out Dia (in mm)	Outer Dia (in mm)	Height (in mm)
RNMCOB4	4	560	58	68	35
RNMCOB7	7	980	70	88	40
RNMCOB12	12	1680	85	105	55
RNMCOB18	18	2520	105	120	75
RNMCOB24	24	3600	105	120	75

**Available Color Temperature (CCT) :**  
2700K, 3000K (Warm White), 3500K, 4000K (Natural White), 5000K, 5700K, 6500K (Cool White)

**Available Housing Color : White / Black**

## Technical Specification : -

**Input Voltage :**  
110Vac- 270Vac / 50Hz-60Hz

**Beam Angle : 36 Degree**



**CRI (Color Rendering Index) : 80**

**Surge Protection : 2Kv Inbuilt**

**Power Factor : >0.90**

**THD : <10%**

**Housing Material : Powder Coated Non- Corrosive Aluminum Die-Cast**

**LED Source : LM80 Certified COB LED (CREE/Bridglux/Edision/Seoul)**

**Short Circuit & Open Circuit Protection / Built-In PFC Function**

**440Vac Input Voltage Protection / Under Voltage & Over Voltage Protection**



**CLICK TO CONNECT**



Warranty upto 60 Months



BIS Approved LED Driver



Made in India



Premium Products

# COB CYLINDER LIGHT

Illuminate with Grace & Precision

Model No.	Watt	Lumens	Outer Dia (in mm)	Height (in mm)
RNCYL7	7	980	55	100
RNCYL12	12	1680	55	100
RNCYL18	18	2520	75	132
RNCYL24	24	3600	75	132
RNCYL36	36	5040	100	200

**Available Color Temperature (CCT) :**  
 2700K, 3000K (Warm White), 3500K,  
 4000K (Natural White), 5000K, 5700K, 6500K (Cool White)

## Technical Specification : -

**Input Voltage :**  
 110Vac- 270Vac / 50Hz-60Hz

**Beam Angle :** 140 Degree

**CRI (Color Rendering Index) :** 80

**Surge Protection :** 2Kv Inbuilt

**Power Factor :** >0.90


**THD :** <10%

**Housing Material :** Powder Coated Non- Corrosive Aluminum Die-Cast

**LED Source :** LED Source: LM80 Certified COB LED  
 (CREE/Bridglux/Edision/Seoul)

**Short Circuit & Open Circuit Protection / Built-In PFC Function**

**440Vac Input Voltage Protection / Under Voltage & Over Voltage Protection**

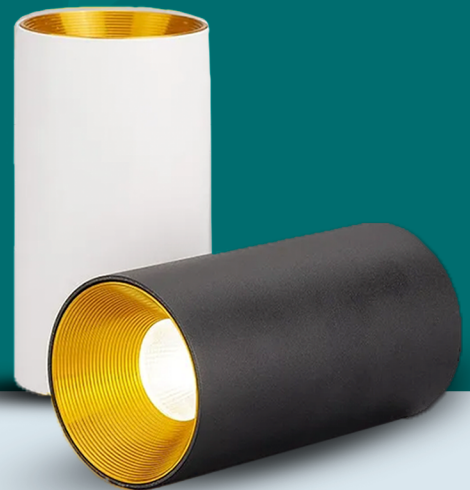

CLICK TO CONNECT



24 Months  
Warranty



BIS Approved  
LED Driver



Made in India



Premium  
Products